



Rough Terrain Scissor Lifts

LGMG

LGMG North America Inc.

KUBOTA DIESEL MOTOR DRIVE

SR3369D Scissor Lift (Rough Terrain)

- Our Rough Terrain scissors are powerful with large platforms for high capacity and efficient outdoor use
- Automatic leveling function enables the machine to work on a slope up to 7° and gives operators a stable work platform
- Closed cycle hydraulic driving system with high-efficiency operations and quick response capabilities keep you on the jobsite longer
- Precise weighing system with pressure sensor and overload alarm function

Product Specifications SR3369D

Platform Capacity	998 lbs
Platform Occupants (Indoor/Outdoor)	4/2
Platform Height	33'
Machine Wheelbase	6' 4"
Platform Width	5' 3"
Machine Height (Rails Up)	8' 5"
Machine Height (Rails Down)	6' 3"
Platform Length	9' 2"
Platform Extension (Single)	14' 2"
Machine Width	5' 10"
Deck Extension Capacity	308 lbs
Drive Speed (Lowered)	3.8 Mph
Drive Speed (Elevated)	0.3 Mph
Drive Mode	4x4
Power	Kubota D1105 18.5kw 24.8hp
Lift Time	39 Secs
Lower Time	46 Secs
Gradeability	35%
Ground Clearance - Center	9"
Machine Weight	9,720 lbs



ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: sales@lmgna.com

Local Sales Contact:

KUBOTA DIESEL MOTOR DRIVE

SR4069D Scissor Lift (Rough Terrain)

- Our Rough Terrain scissors are powerful with large platforms for high capacity and efficient outdoor use
- Automatic leveling function enables the machine to work on a slope up to 7° and gives operators a stable work platform
- Closed cycle hydraulic driving system with high-efficiency operations and quick response capabilities keep you on the jobsite longer
- Precise weighing system with pressure sensor and overload alarm function

Product Specifications SR4069D

Platform Capacity	805 lbs
Platform Occupants(Indoor/Outdoor)	3/2
Platform Height	40'
Machine Wheelbase	7' 6"
Platform Width	5' 3"
Machine Height (Rails Up)	8' 10"
Machine Height (Rails Down)	6' 8"
Platform Length	9' 2"
Platform Extension (Single)	14' 1"
Machine Width	5' 10"
Deck Extension Capacity	310 lbs
Drive Speed (Lowered)	3.8 Mph
Drive Speed (Elevated)	0.3 Mph
Drive Mode	4x4
Power	Kubota D1105 T4f 24.4hp
Lift Time	61 Secs
Lower Time	55 Secs
Gradeability	35%
Ground Clearance - Center	6"
Machine Weight	11,176 lbs



ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201


Email: sales@lmgna.com

Local Sales Contact:

DEUTZ DIESEL MOTOR DRIVE

SR3390D Scissor Lift (Rough Terrain)

- Our Rough Terrain scissors are powerful with large platforms for high capacity and efficient outdoor use
- Automatic leveling function enables the machine to work on a slope up to 7° and gives operators a stable work platform
- Closed cycle hydraulic driving system with high-efficiency operations and quick response capabilities keep you on the jobsite longer
- Precise weighing system with pressure sensor and overload alarm function

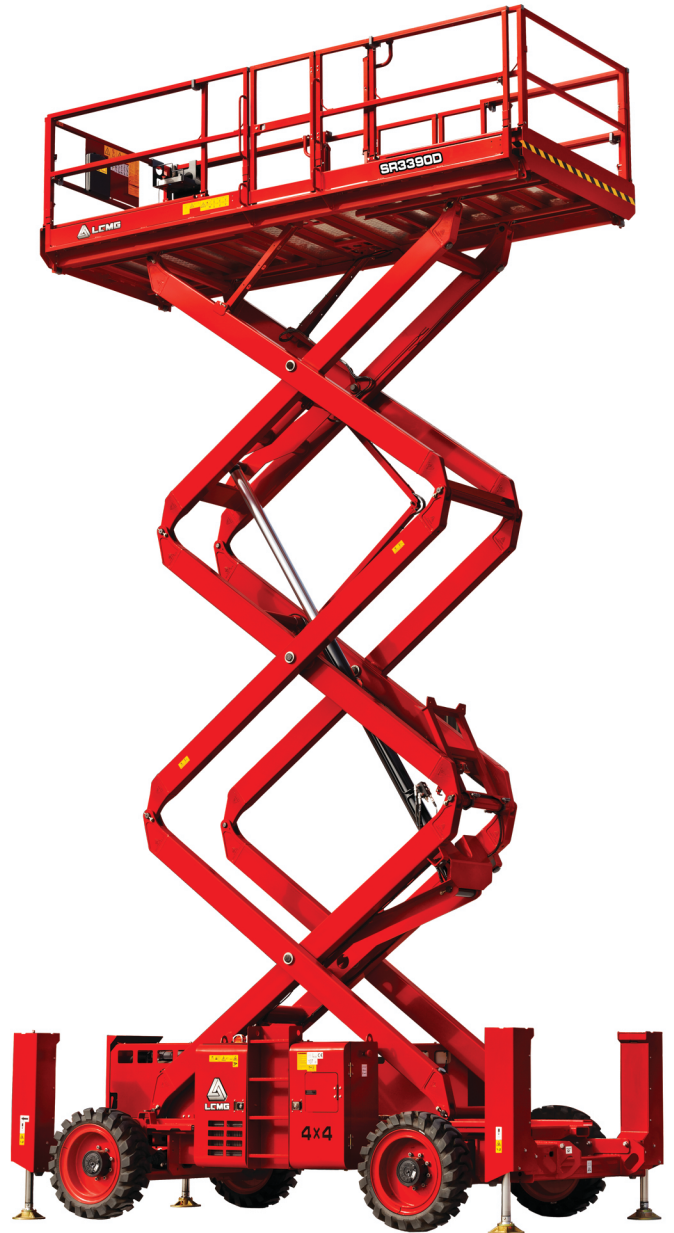

Product Specifications	SR3390D
Platform Capacity	2,425 lbs
Platform Occupants	7
Platform Height	33'
Machine Wheelbase	9' 4"
Platform Width	5' 7"
Machine Height (Rails Up)	9'
Machine Height (Rails Down)	6' 9"
Platform Length	12' 11"
Platform Extension (Single)	17' 6"
Platform Extension (Double)	21' 3"
Machine Width	7' 6"
Deck Extension Capacity	507 lbs
Drive Speed (Lowered)	3.8 Mph
Drive Speed (Elevated)	0.3 Mph
Drive Mode	4x4
Power	Deutz D2.9L4
Lift Time	45 Secs
Lower Time	45 Secs
Gradeability	40%
Ground Clearance - Center	9"
Machine Weight	15,170 lbs

ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: sales@lmgna.com

Local Sales Contact:

DEUTZ DIESEL MOTOR DRIVE

SR4390D Scissor Lift (Rough Terrain)

- Our Rough Terrain scissors are powerful with large platforms for high capacity and efficient outdoor use
- Automatic leveling function enables the machine to work on a slope up to 7° and gives operators a stable work platform
- Closed cycle hydraulic driving system with high-efficiency operations and quick response capabilities keep you on the jobsite longer
- Precise weighing system with pressure sensor and overload alarm function

Product Specifications	SR4390D
Platform Capacity	1,500 lbs
Platform Occupants	7
Platform Height	43'
Machine Wheelbase	9' 4"
Platform Width	6'
Machine Height (Rails Up)	9' 9"
Machine Height (Rails Down)	7' 6"
Platform Length	12' 9"
Platform Extension (Single)	17' 6"
Platform Extension (Double)	21' 3"
Machine Width	7' 6"
Deck Extension Capacity	507 lbs
Drive Speed (Lowered)	3.8 Mph
Drive Speed (Elevated)	0.3 Mph
Drive Mode	4x4
Power	Deutz D2.9L4
Lift Time	45 Secs
Lower Time	45 Secs
Gradeability	40%
Ground Clearance - Center	9"
Machine Weight	15,984 lbs



ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: sales@lmgna.com

Local Sales Contact:

DEUTZ DIESEL MOTOR DRIVE

SR5390D Scissor Lift (Rough Terrain)

- Our Rough Terrain scissors are powerful with large platforms for high capacity and efficient outdoor use
- Automatic leveling function enables the machine to work on a slope up to 7° and gives operators a stable work platform
- Closed cycle hydraulic driving system with high-efficiency operations and quick response capabilities keep you on the jobsite longer
- Precise weighing system with pressure sensor and overload alarm function

Product Specifications	SR5390D
Platform Capacity	1,500 lbs
Platform Occupants	7
Platform Height	53'
Machine Wheelbase	9' 4"
Platform Width	6'
Machine Height (Rails Up)	10' 5"
Machine Height (Rails Down)	8' 2"
Platform Length	12' 9"
Platform Extension (Single)	17' 6"
Platform Extension (Double)	21' 3"
Machine Width	7' 6"
Deck Extension Capacity	507 lbs
Drive Speed (Lowered)	3.8 Mph
Drive Speed (Elevated)	0.7 Mph
Drive Mode	4x4 / 4x2
Power	Deutz D2.9L4
Lift Time	55 Secs
Lower Time	55 Secs
Gradeability	40% / 30%
Ground Clearance - Center	9"
Machine Weight	17,640 lbs



ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: sales@lmgna.com

Local Sales Contact: